Print & Cut LED-UV Curable Inkjet Printer

Speedy and easy printing and cutting by just one unit. Upcoming line of UCJV300 series!



"High-spec" models applying the 4-layer/5-layer print



Printable up to 800mm width

Small foot-print and versatile model covering wide range of stickers, labels and point of sales materials making.

UCJV300-107 1.1m width



00

Printable up to 1090mm width

Quick printing and cutting to apply a BO size poster of commercial print besides promotional items of various type of media.

UCJV300-130

1.3m width

Printable up to 1361mm width

Suitable for both signage and point of marketing materials. Quick processing without ink drying time by UV-LED to reduce the working time significantly for orders in short delivery time.



UCJV300-160

1.6m width

Printable up to 1610mm width

Applicable to large format sign, long-sized sticker, vehicle wrapping films, too

Reliable functions for Print & Cut to wide sized print production.

UCJV150-160

Entry model for LED-UV Print & Cut Superior cost-effectiveness 1.6 meter width model to fulfill customer various demands.



Specifications

Item		UCIV300-75	UCIV300-107	UC V300-130	UC V300-160	UCIV150-160				
Print head				On-demand piezo head						
Print resolution		300dpi , 600dpi , 900dpi , 1200dpi								
Droplet size		Min. 7pl, Max. 28pl								
Head gap		3 degrees adjustable (2.0/2.5/3.0mm) by manual								
Ink	Туре	LED-UV ink								
	туре		LUS-170/200							
	Color	LUS-170(C,	M,Y,K,Lc,Lm,W / C,M,Y,K,Cl,W /	(C,M,Y,K) LUS-200(C,M,Y,K,V	(C,M,Y,K)					
	Capacity	IL (Bottle supply)								
Max. print width		800mm (31.5in)	1,090mm (42.9in)	1,361mm (53.5 in)	1,610mm (63.4in)					
Max. media width		810mm (31.9in)	1,100mm (43.3in)	1,371mm (54.0 in)	1,620mm (63.8in)					
Media t	hickness	1.0mm or less								
Media roll or	uter diameter	250mm or less								
Media roll weight		40kg (88.2 lb) or less								
Cut speed		Max. 300mm / s (420mm / s in 45 degrees direction)								
Cut pressure		10 - 450gf								
Cutter types		Eccentric cutter, Blade for small character, Blade for reflective sheet								
		Blade for fluorescent sheet, Standard blade for vinyl								
		VCCI Class A / FCC Class A / Compliant with UL 60950-1, ETL								
Safety s	standard	CE Marking (EMC, Low Voltage, Machinery Directive), RoHS								
		CB Report / REACH · ENERGY STAR / RCM								
Interface		USB2.0 / Ethernet1000 BASE-T								
Power supply		Single phase (AC100 - 120/200-240V ± 10%, 50 / 60Hz ± 1Hz) x2								
Power consumption		AC100V : 1.44kW / AC200V : 1.92kW x2 or less								
Operational environment		Temperature : 20-30 degC / 68-86 degF, humidity : 35-65% Rh (No condensing)								
Outside dim		2,090 × 776 × 1,475	2,380 × 776 × 1,475	2,650 × 776 × 1,475		76 × 1,475				
(W × D	/	82.3 × 30.6 × 58.1	93.7 × 30.6 × 58.1	104.3 × 30.6 × 58.1		0.6 × 58.1				
Weig	ht kg/lb	139/306.4	156/343.9	172 / 379.2	188 / 414.5	183/403.4				

perifications, designs and dimensions stated in this list may be subject to change without notice due to technical impr

Supplies

11						
Product name	Color	Item code	Remarks			
	Cyan	LUS17-C-BA	I			
	Magenta LUS17-M-BA Yellow LUS17-Y-BA					
LUS-170	Black	LUS17-K-BA	1L bottle			
LU3-1/U	Light Cyan					
	Light Magenta					
	White LUS17-W-BA					
	Clear	LUS17-CL-BA				
	Cyan	LUS20-C-BA				
	Magenta	LUS20-M-BA				
LUS-200	Yellow	LUS20-Y-BA	1L bottle			
	Black LUS20-K-BA					
	White	LUS20-W-BA				

Print speed

UCJV300 Series (4C 1Layer) LUS-170/LUS-200						UCJV150-160 (4C 1Layer) LUS-170/LUS-200							
	Model		UCJV300-75	UCJV300-107	UCJV300-130	UCJV300-160	Model			UCJV150-160			
Print mode			Print speed (m³/h)			Print mode				F	Print speed (m³/h)		
Draft	300x600 4P	Bi/STD	18.0	21.5	24.0	25.8	Draft 300x600		0 8 P	Bi/STD		13.4	
High Speed	300x900 6P	Bi/STD	14.2	17.0	19.1	20.6	High Speed 300x900		0 12P	P Bi/STD		10.6	
Standard	600x600 8P	Bi/Hi	10.8	13.0	14.6	15.7	Standard	Standard 600x600		P Bi/Hi		8.0	
Quality	600x120016P	Bi/Hi	5.6	6.7	7.5	8.0	Quality 600x1200		0 32P	P Bi/Hi		4.0	
High Quality	1200x1200 16P	Bi/Hi	3.5	4.1	4.5	4.7	High Quality 1200x1200 3		0 32F	P Bi/	'Hi	2.4	
	UCJV300 Series (5C/6C/7C 1Layer) (LUS-170:6C/7C LUS-200:5C) UCJV300-160 (5C/6C/7C Multi layers) (LUS-170:6C/7C LUS-200:5C)										00:5C)		
Model			UCJV300-75	UCJV300-107	UCJV300-130	UCJV300-160	Model 2 layer			2 layer	3 layer	4 layer	5 layer
Print mode			Print speed (m²/h)			Print mode			Print speed (m³/h)				
Draft	300x600 8P	Bi/STD	9.6	11.3	12.6	13.4	High Speed	300x90012P	Bi	5.4	3.6	2.7	2.1
High Speed	300x900 12P	Bi/STD	7.4	8.9	9.9	10.6	Standard	600×60016P	Bi	4.0	2.7	2.0	1.6
Standard	600×60016P	Bi/Hi	5.6	6.7	7.5	8.0	Quality	600x1200 32P	Bi	2.0	1.3	1.0	0.8
Quality	600x1200 32P	Bi/Hi	2.9	3.4	3.8	4.0	High Quality	1200×1200 32P	Uni	1.2	0.8	0.6	0.5
High Quality	1200x1200 32P	Bi/Hi	1.8	2.1	2.3	2.4							

/ Inks and substrates:

 Please note that properties and adhesion, weather resistance, etc. of ink and substrates can vary. Please test materials before printing.
Some substrates require primer before printing. Please test materials beforehand or ask your sales representative.

•Some examples shown in this catalogue are artificial renderings. •Specifications, designs and dimensions shown in this catalogue may be subject to change without notice for technical improvements. The corporate and merchandise names in this catalogue are the trademarks or registered trademarks of the respective corporations. Inkiet printers use extremely fine dots, so colors may vary slightly after replacement of print heads. Also note that when using multiple printer units, colors could vary slightly from one unit to another due to slight individual differences Please note that descriptions and data in this catalogue are as of February 2019.

MIMAKI ENGINEERING CO., LTD. **Mimaki**

2182-3 Shigeno-otsu, Tomi-city, Nagano 389-0512, Japan Tel. +81-268-64-2281

Mimaki Global Network

Singapore MIMAKI SINGAPORE PTE. LTD.

mimaki.com

MIMAKI USA, INC. MIMAKI BRASIL COMERCIO E IMPORTACAO LTDA MIMAKI INDIA PRIVATE LIMITED MIMAKI ENGINEERING (TAIWAN) CO., LTD.

MIMAKI EUROPE B.V Europe Indonesia PT. MIMAKI INDONESIA Australia MIMAKI AUSTRALIA PTY. LTD. SHANGHAI MIMAKI TRADING CO., LTD.

Software



Safety notice: These printers produce UV radiation. To protect your health, please observe the following guidelines carefully: Do not look directly into the UV light source, or expose your skin (such as your hands) directly to the UV light source.
Depending upon the print mode, some VOCs could be emitted from printed area ont yet cured and hardened.
In addition, please read and follow the instructions and guidelines of the manual carefully.



For SIGN GRAPHICS

Print & Cut LED-UV Curable Inkiet Printer





Leading the Future of Sign Graphics through UV Innovation

Mimciki



Sector Barton Barton

15 11/300-160













UCJV300series UCJV150-160

UV-LED print enhancing the work

efficiency

Ecological

newly developed ink

A wide range

of materials

×

UV ink


. 0.

Leading the Future of Sign Graphics through UV Innovation

Immediate processing and deliver are available by UV-LED.

With the UV ink property of immediate curing upon UV light irradiation no drying time is required. The post-processing and sign applying are possible instantly. Required time for production is saved to be possible to undertake even an order of tight scheduled work. It is immune from ink blocking while printing by multi layers or using white ink. There is no necessity to mind media stains nor to attend by operator.



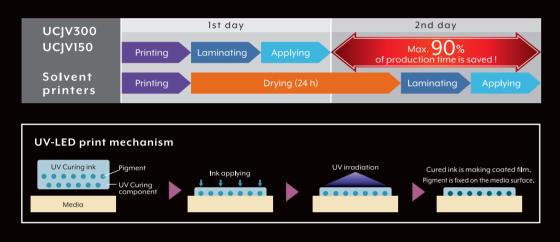

Newly developed environmentally friendly UV ink, [LUS-170]

ing short-wavelength UV. The yellow ink of [LUS-170] is eco-friendly and nickel-free though the nickel is used in some general vellow inks.

Flexible UV ink with the stretch ability up to 200%, [LUS-200]


The [LUS-200] ink has the stretch ability up to 200%. This capability suits stretch film applications such as vehicle wrapping. Printed films can be applied onto curved surface successively without ink cracking. [LUS-170] and [LUS-200] gained the [GREENGUARD Gold] certification, which is based on most strict globa standard of chemical substance diffusion.

The GREENGUARD Gold certification assures the product property conforms to schools and medical facilitie

Printing is possible on a wide range of materials!

UV ink is printable to PVC and tarpaulin which are compatible with solvent, as well good matching with fabric, non specified ink receiving paper and PET. More varied applications with UC/V300 Series due to mountable white ink.









car wrapping film by one unit only.

[ID Cut] can help to cut easily even for multiple types data of small lot of each.

[ID Cut] is to print together ID (Barcode) for recognition of cutting details and media rotation with crop marks while placing the crop mark on the RIP. And then cut data of every print data is readable to start cutting automatically. Then with this function, cutting starts without any respective cutting order by operator at RIP software. It saves media losses by failure of data transmission.

Immediate materializing

an image idea by

Print & Cut

UV printing


Print & Cut

to broaden the range

of applications.

Expression selectable

UV Clear ink

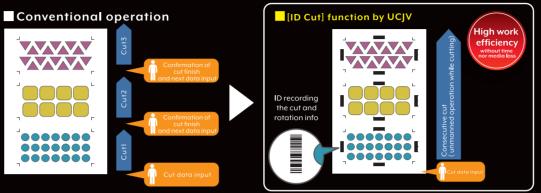

Broad range of applications

Print & Cut with instant drying UV-curable ink can broaden the range of applications. Integrated promotional approach will suit the method and image of marketing and expand business opportunitie



UV Clear ink widening the scope of design and business possibility

LUS-170 Clear ink is available with UC/V300 Series. shiny sheen and [matte finish] producing a muted matting effect



Sizzling effect by glossy finis



[UC|V Series] are equipped with cutting function of high performance and high efficiency to be able to make labels, stickers and




The superior function [Mimaki Clear Control] equipped with UC|V300 Series can achieve beautiful clear printing suppressing the dust adherence and bubble generation by processing the clear ink print and UV-light irradiation simultaneously

There are two types of print modes you can choose from depending on your purpose: [glossy finish] of sense of class given by

Moreover, by installing RasterLink6Plus attached to the UC/V300 Series, [ARTISTA UV Texture Library] with 129 types of swatches in Adobe Illustrator can be used. The Library provides plenty of textures to widen the scope of design and business





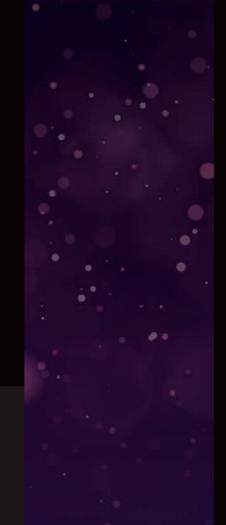


Multi-layer print for a new advertisement expression (Available for UCJV300 Series only)

Four-layer print [Day&Night Printing]

A very new advertising expression with showing different image effect between daytime and nighttime which can be created by four-layer print* [Day & Night Printing], a visible design change is presented by backlighting of four-layer print of [Color]+[Black]+[White]+[Color]. A proposal of highly designed sign can be put forward without any retouches of current simple light box but just ON/OFF of internal lamp. It can make a graphic change or an illumination of specified area etc * Four-layer print is available only to UCIV300 series that white in



[Back light OFF]





[Back light ON] Visible image in highttime, By backlighting, the color image of 1st layer is coming up

4th laver

3th layer

Black layer: for shading

2nd layer

Five-layer print [Front&Back Printing]

Different printed design can appear on the "Front and Back" by one time print.

By printing on a transparent film with five layers, the [Front&Back Printing] of different design on the two sides is realized.

A different image of indoor and outdoor of one window sign, etc. , it is a new proposal of more attractive sign with higher design property





Outside