

# UJV100-160Plus



For  
SIGN  
GRAPHICS

Standard RIP Software


**Raster Link 7**

**Supporting the beauty of prints and operability**

- Ink Saving Function - Easy to operate for everyone
- Supports cut data output to our entry model cutting plotter, the CG-AR series

Mimaki Cloud Technology **PICT**


The printer's operating status and ink usage can be monitored even when the user is away from the printer. It supports planned operations, such as performing other tasks while printing is in progress. It also enables advanced planning of maintenance schedules and preparation for ink refills.



Operate machines remotely

**MRA**  
(Mimaki Remote Access)

List ink type, heater temperature, and notification alerts on a smartphone or Windows-based PC. The machine can be operated remotely with the same feeling as the control panel of the actual machine.

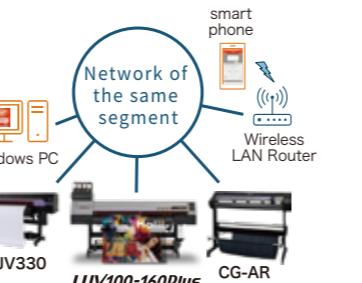

■ Print speed

①Gloss PVC in 4-Color Set		②Banner·Synthetic paper 4-color Set		③Transparent Film 4C + W/CL Set 1 or 2 layer (No Pull-back printing)		④Transparent Film 4C + W/CL Set 2 or 3 layer (Pull-back printing in use)	
Print Mode	Print Speed(m/h)	Print Mode	Print Speed(m/h)	Print Mode	Print Speed(m/h)	Print Mode	Print Speed(m/h)
High Speed	360×1200 8P Bi	18.6	Draft	300×900 6P Bi	23.0	High Speed	360×1200 8P Bi
Standard	720×900 12P Bi	13.6	High Speed	360×1200 8P Bi	18.6	Standard	720×900 12P Bi
Quality	720×900 16P Bi	10.0	Standard	720×900 12P Bi	13.6	Quality	720×900 16P Bi
High Quality	1200×1200 16P Bi	7.0	High Quality	1200×1200 16P Bi	7.0	High Quality	1200×1200 16P Bi

\*Print speed is half of the above figure when printing ①② in 4C + W/CL Set

\*Media pull-back operation time and RIP time after pull-back are excluded

■ Specifications

Item	UVJ100-160Plus
Print head	On-demand piezo head (double head staggered layout)
Printing resolution	360 dpi, 720 dpi, 900 dpi, 1200dpi
Ink	Type/Color: UV-curable ink LUS-170, LUS-190, LUS-210 (C,M,Y,K,W,CL) *Availability varies depending on the regions
Capacity	1L bottle
Maximum drawing range	1,610 mm (63 in)
Maximum width	1,620 mm (64 in)
Thickness	1.0 mm or lower
Roll diameter	φ 250 mm or less
Roll weight	45kg (99 lb) or less
Inner diameter	2 inch / 3 inch
Interface	USB 2.0 / Ethernet 1000BASE-T
Power specifications	Single-phase AC100-120V±10%/12A, AC200-240V±10%/8A, 50/60Hz±1Hz
Power consumption	Maximum 500W (operating), 4.5W (sleep)
Operational environment	Temperature: 20-30 degC (68-86 degF) Humidity: 35-65%Rh (without condensation)
Certifications	VCCI-class A, FCC class A, ETL IEC62368-1, CE Marking (EMC, Machinery Directive, Low voltage, RoHS) CB, REACH, Energy Star, RCM, EAC
External dimensions (WxDxH)	2,775 x 700 x 1,475 mm (109 x 28 x 58 in)
Main unit weight	167 kg (368 lb)

**Links and substrates:**

● Please note that properties and adhesion, weather resistance, etc. of ink and substrates can vary.  
Please test materials before printing.

**Safety notice:** These printers produce UV radiation.

To protect your health, please observe the following guidelines carefully:  
● Do not look directly into the UV light source, or expose your skin (such as your hands) directly to the UV light source.  
● Depending upon the print mode, some VOCs could be emitted from printed area not yet cured and hardened.  
● In addition, please read and follow the instructions and guidelines of the manual carefully.

■ Supplies

	Color	Item code	Remarks
LUS-170 UV ink GREENGUARD Gold certified ink	Cyan	LUS17-C-BA	1L bottle
	Magenta	LUS17-M-BA	
	Yellow	LUS17-Y-BA	
	Black	LUS17-K-BA	
	White	LUS17-W-BA	
	Clear	LUS17-CL-BA	
LUS-190 UV ink GREENGUARD Gold certified ink	Cyan	LUS19-C-BA	1L bottle
	Magenta	LUS19-M-BA	
	Yellow	LUS19-Y-BA	
	Black	LUS19-K-BA	
	White	LUS19-W-BA	
	Clear	LUS19-CL-BA	
LUS-210 UV ink GREENGUARD Gold certified ink	Cyan	LUS21-C-BA	1L bottle
	Magenta	LUS21-M-BA	
	Yellow	LUS21-Y-BA	
	Black	LUS21-K-BA	
	White	LUS21-W-BA	
	Clear	LUS21-CL-BA	

The LUS-170 has acquired "GREENGUARD Gold certification", which is guaranteed to be suitable for schools and medical institutions based on the strictest chemical substance diffusion standards in the world. This ink generates almost no VOC (\*1)(\*2), which is the cause of photochemical oxidant generation, and is designed to reduce load to the global environment.



\*1 : VOC=Volatile organic compounds

\*2 : No volatile organic compounds are generated after UV curing by our internal investigation, but may occur very slightly before curing.

● Some examples shown in this catalog are artificial renderings. ● Specifications, designs and dimensions shown in this catalog may be subject to change without notice for technical improvements. ● The corporate and merchandise names in this catalog are the trademarks or registered trademarks of the respective corporations. ● Inkjet printers use extremely fine dots, so colors may vary slightly after replacement of print heads. ● Also note that when using multiple printer units, colors could vary slightly from one unit to another due to slight individual differences. ● Please note that descriptions and data in this catalog are as of January 2024.

**Mimaki™ MIMAKI ENGINEERING CO., LTD.**

2182-3 Shigeno-Otsu, Tomi-city, Nagano 389-0512, Japan  
TEL:+81-268-64-2281

Mimaki Global Network

USA MIMAKI USA, INC.  
Brazil MIMAKI BRASIL COMERCIO E IMPORTACAO LTDA  
India MIMAKI INDIA PRIVATE LIMITED  
Taiwan MIMAKI ENGINEERING (TAIWAN) CO.,LTD.  
Singapore MIMAKI SINGAPORE PTE. LTD.  
Vietnam MIMAKI VIETNAM CO., LTD.

Europe MIMAKI EUROPE B.V.  
Indonesia PT. MIMAKI INDONESIA  
Australia MIMAKI AUSTRALIA PTY. LTD.  
China SHANGHAI MIMAKI TRADING CO.,LTD.  
Thailand MIMAKI (THAILAND) CO.,LTD.


DB10384-02



Roll-to-Roll LED-UV Curable Inkjet Printer

**UJV100-160Plus**

Expert printing made easy.

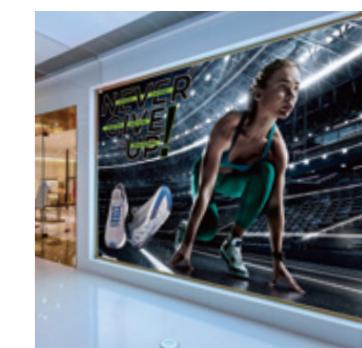

**Mimaki**  
Green Technology



# UJV100-160Plus

Expert printing made easy.

## UV is Eco, an environmentally and people-friendly choice.

Printers that use UV-LEDs are extremely energy-efficient and environmentally friendly. Efficient energy use leads to lower CO<sub>2</sub> emissions and contributes to business sustainability. The printer is also operator-friendly, using GREENGUARD-GOLD certified ink that generates almost no substances that may affect the human body.

## Pursue business efficiency and diversity with UV

Substrates printed using UV inks can be post-processed immediately after printing, such as lamination and cutting.


The printer also supports a variety of substrates, including transparent film or paper without a receiving layer. Furthermore, the combination of white and clear inks greatly expands the range of applications.

## 3 new features

### Ink Saving Function

Reduce ink usage while maintaining color balance

Ink usage is reduced by up to 50% while maintaining the natural color gradation of the design. In addition to power costs, the UJV100-160Plus is a user-friendly, sustainable unit that reduces ink costs through simple operation.

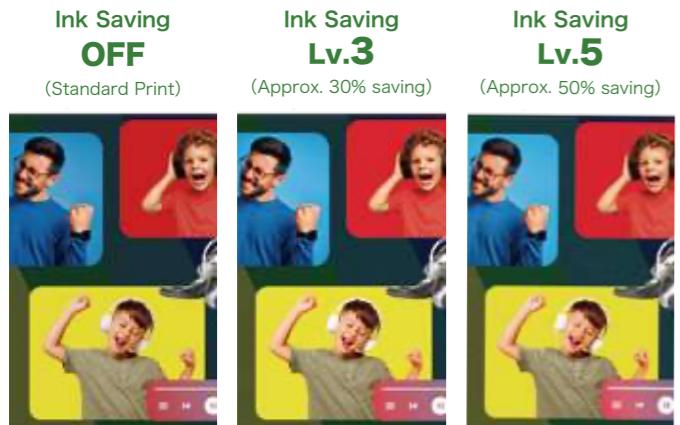

#### 【CAUTION】

Since the Ink Saving Function replaces CMY ink with K, graininess may be noticeable in some data.

Please change the ink saving level according to the nature of your work.

### Pull-Back Printing Function

Up to 3-layer printing - Express your ideas freely

#### 2-Layer Print

Both printing orders are possible regardless of the ink set orders

#### Vivid expression on colored substrates

White ➡ Color



#### Vivid expressions on transparent substrates

Color ➡ White



Application : Labels



Application : Window Graphics



#### 3-Layer Print


Even more versatile expressions with the Pull-Back Print Function

#### Faithful color representation for day and night

Color ➡ White ➡ Color




Application : Backlit Signage



#### A variety of expressions in one piece

White ➡ Color ➡ Clear



Application : Window Signage




### Direct cut data output from RasterLink7 to the CG-AR vinyl cutter

Convenient printer and plotter interlocking for improved usability

Print + cut linkage is possible even if the output PC does not have DTP software.

Improved work efficiency by eliminating the need to launch dedicated cutting software

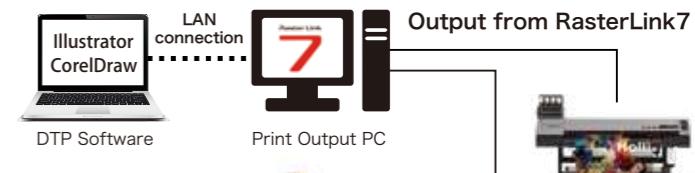

Labels

Wobblers

Floor Signage

## Mimaki's technology pursues high quality, operability and stable production



Stable high density x quality  
**MAPS4 : Mimaki Advanced Pass System**


The printing pass borders are printed in a gradation style to achieve smooth printing even at high densities.

Automatically optimizes output according to printing conditions

(Without MAPS4) ➡ image



(With MAPS4) ➡ image



Reproduces standard image quality, achievable at a beginner operator level  
**DAS : Dot Adjustment System**

Automatically performs necessary adjustments when media or print conditions are changed. Supports print output by reducing labor and operator adjustment variation.

Blurring due to dot misalignment

Overlapping lines by feed-error

Gaps due to feed-error

Automatic adjustment by DAS





Even in case of nozzle trouble Continuous output without waste  
**NCU & NRS**

NCU (Nozzle Check Unit)

A sensor detects nozzle defect and nozzle cleaning performed automatically to reduce the material waste.

NRS (Nozzle Recovery System)

Supports continuous production without waiting for service personnel, when nozzle defect is unrecoverable by nozzle cleaning.

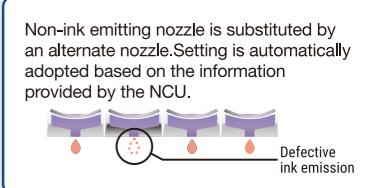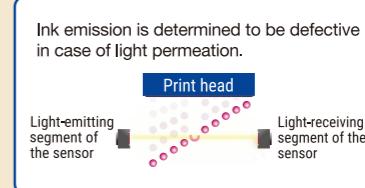

\*The function may be limited by missing-nozzle position and amount